



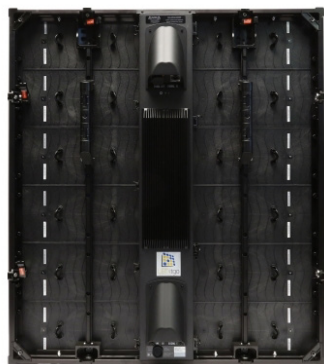


sB6io

Technisches Datenblatt

HIGH-BRIGHTNESS
HIGH-CONTRAST
FAST-LOCK-SYSTEM
FRONT/ REAR-SERVICE
MAGNETIC-FAST-RIGG
LIGHT-WEIGHT
TOOLLESS
BLACKFRAME-LED

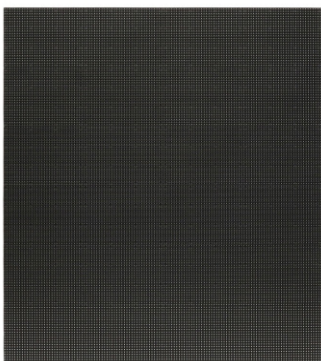

Pixelpitch	6,2 mm
Helligkeit	6.000 Nits kalibriert (7.500 Nits max.)
SMD-Typ	Nationstar 2727 3-in-1 Black Body SMD
SMD Merkmale	Blackframe, High-Brightness, High-Contrast
Farbtiefe	16 Bit pro Farbkanal
LED Treiberchip	MBI5151
Receivingcard	MRV470
Scanmodus	1/4
Refreshrate	> 3.000 Hz
Horiz. Blickwinkel	+160°/-160°
Vert. Blickwinkel	+20°/-60°
Kontrast	> 3.000:1
Nennleistung in W	Typisch 140W/ max. 250W
Spannungsbereich	AC 90-264V/ 50-60 Hz
Stromanschluss	Neutrik powerCON TRUE1
Abmessungen	800 x 900 x 120 mm (BxHxT)
Gewicht	19,5 kg
IP Klasse	IP65 Front / IP54 Rückseite
Temperaturbereich	Im Betrieb: -10°C bis + 60°C Lagernd: -10°C bis + 70°C
Produkthighlights	Fast-Lock-System, Magnetic-Fast-Rigg, Light-Weight, Tool-Less, Front/ Rear-Service
Zertifizierungen	   EMC